



GreenPerform Elite Panel RC190

RC190X LED32S 930 W30L120 OC SW CAU

Polystyrene bowl/cover prismatic -

GreenPerform Elite RC190 LED Panel is a comprehensive office family featuring control interface options. Offering not only Dali interface and Interact control system features to improve your office lighting management, it also gives you the benefits of CRI90 and UGR19 which improve the light quality to provide enhanced well-being in your office. The multiple product sizes, e.g. 600x600; 300x1,200; 600x1,200, provide a wide range of options for your office lighting design. With all the features offered by the RC190, it's time to show your true colours.

Product data

General Information		Controls and Dimming	
Lamp colour code	930 warm white	Dimmable	Yes
Optical cover/lens type	Polystyrene bowl/cover prismatic	Mechanical and Housing	
Control interface	Interact office	Housing material	Aluminum extruded
Protection class IEC	Safety class I (I)	Optical cover/lens material	Polystyrene
CE mark	CE mark	Optical cover/lens finish	Opal
Number of products on MCB (16 A type B)	45	Overall length	1195 mm
Light source engine type	LED	Overall width	295 mm
Operating and Electrical		Overall height	9 mm
Input Voltage	220 to 240 V	Colour	White RAL 9003
Input frequency	50 or 60 Hz	Approval and Application	
Power factor (min.)	0.9	Ingress protection code	IP20 [Finger-protected]


GreenPerform Elite Panel RC190

Mech. impact protection code	-
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	3150 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	90 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial input power	36 W
Power consumption tolerance	+/-10%
Application Conditions	
Ambient temperature range	-20 to +40 °C

Product Data	
Full product code	911401781022
Order product name	RC190X LED32S 930 W30L120 OC SW CAU
Order code	911401781022
SAP numerator – quantity per pack	1
Numerator – packs per outer box	2
SAP material	911401781022
SAP net weight (piece)	1.100 kg



Dimensional drawing

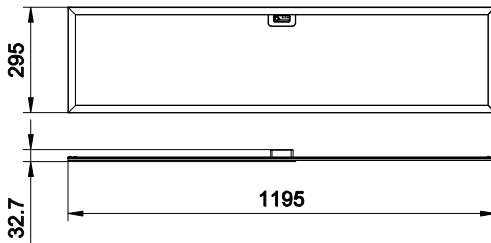

RC190X LED32S 930 W30L120 OC SW CAU

