



Coreline Slim Batten

BN126C LED60S/865 PSU L1500

Polycarbonate diffuser

The new Coreline Slim Batten is slim design and comes in three sizes with two CCT choices based on specific customer needs.

Product data

General Information	
Lamp colour code	865 cool daylight
Optical cover/lens type	Polycarbonate diffuser
Control interface	-
Protection class IEC	Safety class I (I)
CE mark	CE mark
Number of products on MCB (16 A type B)	30
Light source engine type	LED

Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.9

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Housing material	Steel
Optical cover/lens material	Polycarbonate
Optical cover/lens finish	Opal
Overall length	65 mm

Overall width	65 mm
Overall height	1450 mm
Colour	White RAL 9003

Approval and Application	
Ingress protection code	IP20 (front IP40)
Mech. impact protection code	IK04 [0.5 J standard plus]

Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	6000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	107 lm/W
Lamp colour temperature	6500 K
Colour Rendering Index	>80
Initial input power	56 W
Power consumption tolerance	+/-10%

Application Conditions	
Ambient temperature range	-20 to +40 °C

Product Data	
Full product code	692382863856699


Coreline Slim Batten

Order product name	BN126C LED60S/865 PSU L1500
EAN/UPC – product	6923828638566
Order code	911401899280
Local order code	BN126C60865PL15
SAP numerator – quantity per pack	1
Numerator – packs per outer box	6

SAP material	911401899280
SAP net weight (piece)	1.820 kg



Dimensional drawing

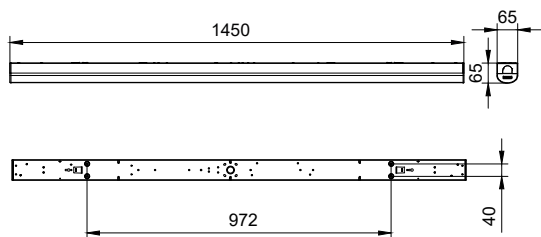

BN126C

