



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 6W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Lamp current (nom.)		0.16 A
Cap base	G5 [G5]	Voltage (Nom)	42 V	
Main application	Insect traps	Mechanical and Housing		
Life to 50% failures (nom.)	10000 h	Bulb shape	T16	
Useful life (nom.)	5000 h	Approval and Application		
Light Technical		Mercury (Hg) content (nom.)	4.4 mg	
Colour Code	10	UV		
Colour Designation	Actinic	UV-B/UV-A (IEC)	0.2 %	
Chromaticity coordinate X (nom.)	222	UV-A radiation 100 hours (IEC)	1.4 W	
Chromaticity coordinate Y (nom.)	210	Product Data		
Depreciation at 500 Hours	17 %	Full product code	871150026039027	
UV depreciation at 1,000 h	25 %	Order product name	Actinic BL TL 6W/10 1FM/10X25CC	
UV Depreciation at 2,000 h	35 %	EAN/UPC – product	8711500260390	
UV depreciation at 5000 hours	50 %	Order code	928000501030	
Depreciation at 500 Hours	60 %	Local order code	TL6W10	
Operating and Electrical				
Power (Rated) (Nom)	6 W			

Actinic BL TL(-K)/TL-D(-K)

SAP numerator – quantity per pack	1
Numerator – packs per outer box	250
SAP material	928000501030

SAP net weight (piece)	21.000 g
------------------------	----------



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 6W/10 1FM/10X25CC	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

TL 6W/10

Photometric data

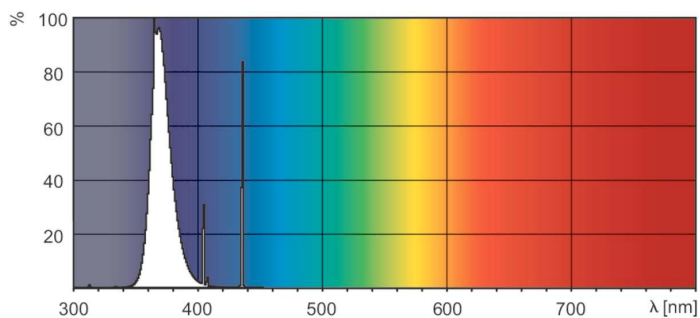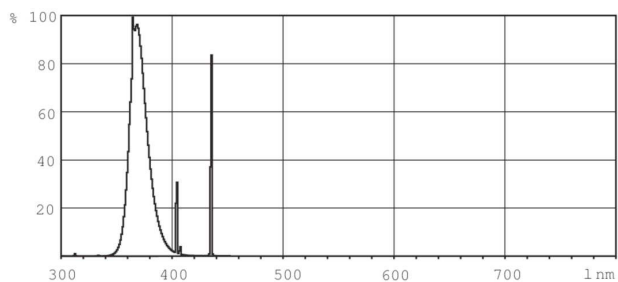

Lightcolour /10

Lightcolour /10

