



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 11W/10

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Mechanical and Housing	
Cap base	G5 [G5]	Bulb shape	T16
Main application	Insect traps		
Useful life (nom.)	2000 h		
Light Technical		Approval and Application	
Colour Code	10	Mercury (Hg) content (nom.)	4.4 mg
Colour Designation	Actinic		
Chromaticity coordinate X (nom.)	230	UV	
Chromaticity coordinate Y (nom.)	230	UV-B/UV-A (IEC)	0.2 %
Depreciation at 500 Hours	30 %	UV-A radiation 100 hours (IEC)	2.0 W
UV depreciation at 1,000 h	40 %		
UV Depreciation at 2,000 h	45 %	Product Data	
		Full product code	871150095145827
Operating and Electrical		Order product name	Actinic BL TL 11W/10
Power (Rated) (Nom)	11.5 W	EAN/UPC – product	8711500951458
Lamp current (nom.)	0.400 A	Order code	928000601030
Voltage (Nom)	34 V	Local order code	TL11W10
		SAP numerator – quantity per pack	1
		Numerator – packs per outer box	250
		SAP material	928000601030

Actinic BL TL(-K)/TL-D(-K)

SAP net weight (piece)

21.000 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 11W/10	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

TL 11W/10

Photometric data

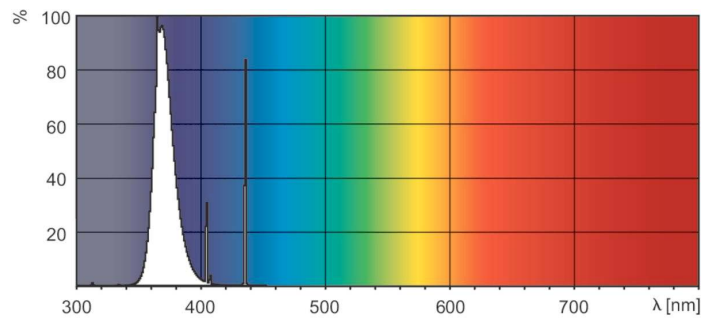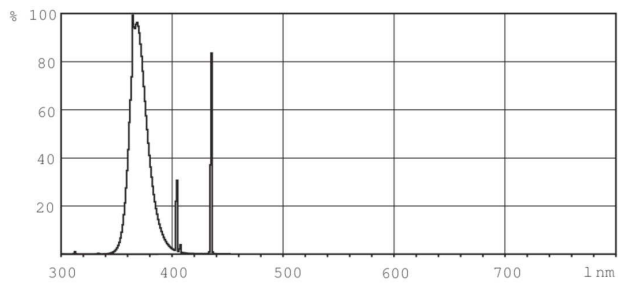

Lightcolour /10

Lightcolour /10

