



Architectural MSA

MSA 2500 DE UNP/1

The high luminous efficacy and optimal lamp filling of the double ended Architectural MSA lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	(P)SFC [(P)SFC]
Burning Position	P15 [Parallel +/-15D or Horizontal(HOR)]
Main application	Architectural
Life to 50% failures (nom.)	2500 h
System description	Double Ended
Light Technical	
Colour Code	856
Lamp Luminous Flux 25°C EL (Nom)	250000 lm
Chromaticity coordinate X (nom.)	330
Chromaticity coordinate Y (nom.)	360
Colour Temperature, horizontal (Nom)	5600 K
Lamp Luminous Efficacy EM (Nom)	100 lm/W
Colour Rendering Index,horiz (Nom)	90
Operating and Electrical	
Power (Rated) (Nom)	2500 W

Lamp current (nom.)	22.5 A
Ignition supply voltage (min.)	198 V
Controls and Dimming	
Dimmable	No
Luminaire Design Requirements	
Bulb temperature (max.)	980 °C
Pinch temperature (max.)	300 °C
Product Data	
Full product code	871150020208600
Order product name	MSA 2500 DE UNP/1
EAN/UPC – product	8718291548300
Order code	928099405103
Local order code	MSA2500DE
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1

Architectural MSA

SAP material	928099405103
SAP net weight (piece)	0.245 kg



Dimensional drawing



Product	D (max)	O	C (max)
MSA 2500 DE UNP/1	41 mm	25 mm	364 mm

MSA 2500 DE

Photometric data

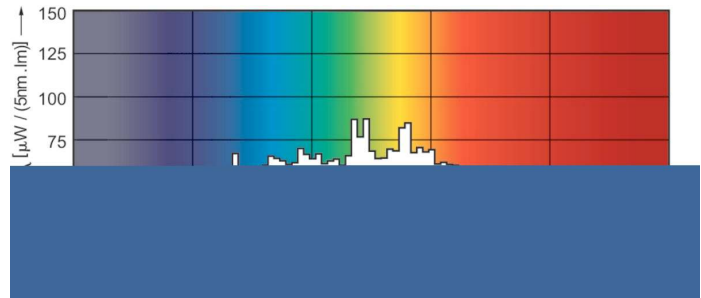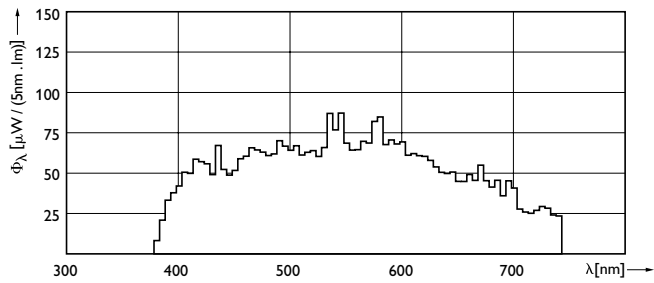

XDPB_XDMSA_2500W_DE-Spectral power distribution B/W

