



MSR Gold™ SA Double Ended

MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	SFC-11 [SFC-11]
Burning Position	UNIVERSAL [Any/Universal]
Main application	Entertainment
Life to 50% failures (nom.)	750 h
System description	SA/2 DE
Light Technical	
Colour Code	2
Lamp Luminous Flux 25°C EL (Min)	39000 lm
Lamp Luminous Flux 25°C EL (Nom)	42000 lm
Chromaticity coordinate X (nom.)	294
Chromaticity coordinate Y (nom.)	317

Colour Temperature, horizontal (Nom)	7500 K
Lamp Luminous Efficacy EM (Nom)	73 lm/W
Colour Rendering Index,horiz (Nom)	75
Operating and Electrical	
Power (Rated) (Nom)	575 W
Lamp current (nom.)	7 A
Ignition supply voltage (min.)	198 V
Controls and Dimming	
Dimmable	No

MSR Gold™ SA Double Ended

Mechanical and Housing

Cap-base information SFC-11

Luminaire Design Requirements


Pinch temperature (max.) 400 °C

Product Data

Full product code 872790091464100
 Order product name MSR Gold™ 575 SA/2 DE 1CT/40

EAN/UPC – product	8727900914641
Order code	928175105114
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	928175105114
SAP net weight (piece)	0.032 kg



Dimensional drawing

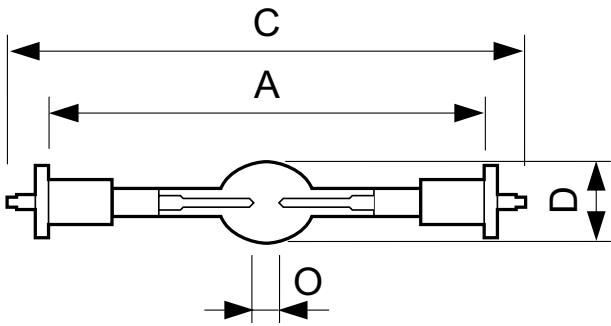

MSR GOLD 575 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE 1CT/40	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm

Photometric data

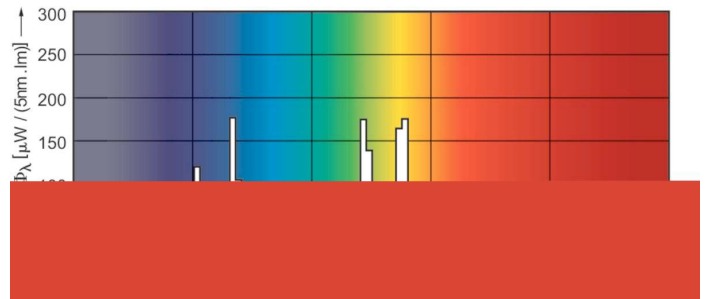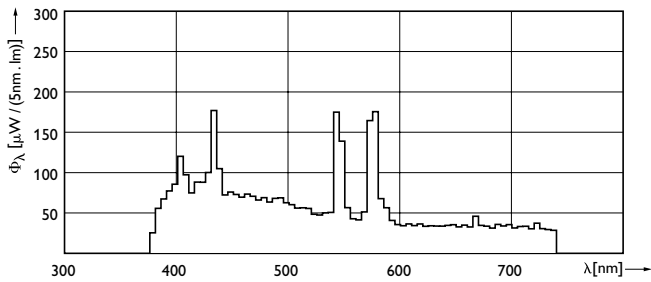

XDPB_XDMSR_575W_SA2-DE-Spectral power distribution B/W

