



# MSR Platinum (Touring/Stage)

## MSR Platinum 35 1CT

Today's stage designs call for lighting solutions which deliver high brightness and high-contrast beams to avoid shadow creation, as well as more compact luminaire and fixture designs to improve creative choice and design flexibility. Addressing this need, we have developed an incredibly powerful, brilliant and lightweight, compact system for the most amazing light experience – MSR Platinum 35. This lamp system provides a powerful and innovative tool to create intense lighting and delivers the same good light quality as other MSR lamps. The exceptionally short arc generates sparkling, bright light and this ultra-compact design makes the lamp suitable for smaller stage lighting fixtures.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	PGJX36 [ PGJX36]
Burning Position	UNIVERSAL [ Any/Universal]
Main application	Studio/Theatre/TV
Life to 50% failures (nom.)	1000 h
System description	na [ -]
Light Technical	
Colour Code	2
Lamp Luminous Flux 25°C EL (Min)	50760 lm
Lamp Luminous Flux 25°C EL (Nom)	56400 lm

Chromaticity coordinate X (nom.)	0.295
Chromaticity coordinate Y (nom.)	0.313
Colour Temperature, horizontal (Nom)	7750 K
Chromaticity coordinate X (SO) (max.)	0.3084
Chromaticity coordinate X (SO) (min.)	0.2913
Chromaticity coordinate X (SO) (nom.)	0.2998
Chromaticity coordinate Y (SO) (max.)	0.3345
Chromaticity coordinate Y (SO) (min.)	0.3063
Chromaticity coordinate Y (SO) (nom.)	0.3204
Colour Rendering Index (SO) (Min)	60.5
Colour Rendering Index (SO) (Nom)	64.5

# MSR Platinum (Touring/Stage)

Colour Temperature (SO) (Max)	8050 K
Colour Temperature (SO) (Min)	6650 K
Colour Temperature (SO) (Nom)	7350 K
Luminous efficacy (SO) (min.)	38 lm/W
Luminous Efficacy (SO) (Nom)	42.5 lm/W
Luminous flux (SO) (min.)	31500 lm
Luminous flux (SO) (nom.)	36500 lm
Lamp Luminous Efficacy EM (Nom)	70.2 lm/W
Colour Rendering Index,horiz (Nom)	73

## Operating and Electrical

Power (Rated) (Nom)	800 W
Lamp current (nom.)	12.0 A
Ignition supply voltage (min.)	220 V
Ignition time (nom.)	10 s

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Cap-base information	PGJX36
----------------------	--------


## Luminaire Design Requirements

Bulb temperature (max.)	950 °C
Pinch temperature (max.)	450 °C

## Product Data

Full product code	871829112006300
Order product name	MSR Platinum 35 1CT
EAN/UPC – product	8718291120063
Order code	928190905114
SAP numerator – quantity per pack	1
Numerator – packs per outer box	16
SAP material	928190905114
SAP net weight (piece)	0.053 kg



## Dimensional drawing

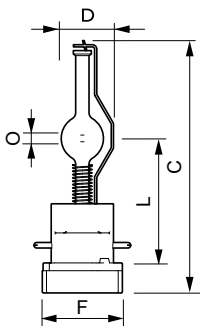

MSR Platinum 35

Product	D (max)	O	L (min)	L (max)	L	C (max)
MSR Platinum 35 1CT	23.5 mm	3.0 mm	55 mm	57 mm	56 mm	116 mm

## Photometric data

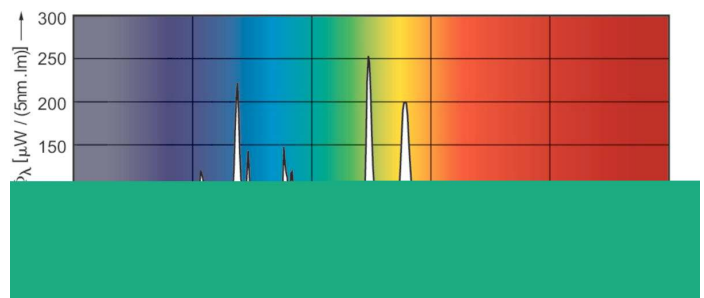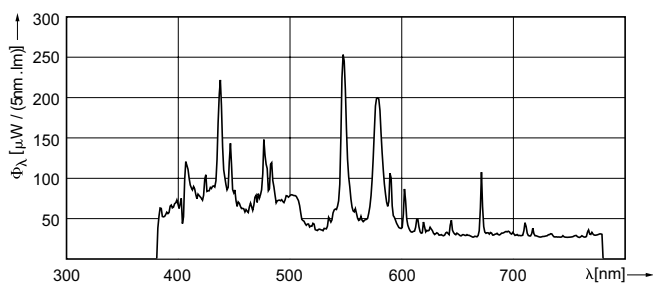

XDPB\_XDMSR\_0005-Spectral power distribution B/W

## MSR Platinum (Touring/Stage)

