



# TL-D Colored

## TL-D Colored 58W Yellow 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Voltage (Nom)	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	111 V	
Life to 10% failures (nom.)	12000 h	Temperature	
Life to 50% failures (nom.)	15000 h	Design temperature (nom.)	25 °C
Light Technical		Controls and Dimming	
Colour Code	160	Dimmable	Yes
Lamp Luminous Flux 25°C EL (Nom)	2250 lm	Mechanical and Housing	
Lamp Luminous Flux (Nom)	2250 lm	Bulb shape	T8 [ 26 mm (T8)]
Colour Designation	Yellow	Approval and Application	
LLMF 2000 h Rated	80 %	Mercury (Hg) content (nom.)	13.0 mg
Operating and Electrical		Energy consumption kWh/1,000 hours	70 kWh
Power (Rated) (Nom)	58.5 W		
Lamp current (nom.)	0.670 A		


# TL-D Colored

## Product Data

Full product code	871150095447340
Order product name	TL-D Colored 58W Yellow 1SL/25
EAN/UPC – product	8711500954473
Order code	928049001605
SAP numerator – quantity per pack	1

Numerator – packs per outer box	25
SAP material	928049001605
SAP net weight (piece)	167.000 g


## Dimensional drawing

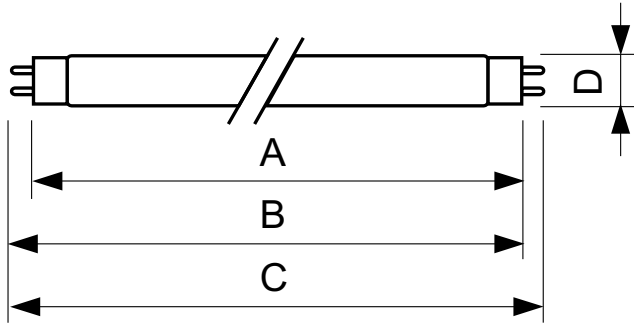


TL-D 58W/160 Yellow

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 58W Yellow 1SL/25	28.0 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

## Photometric data

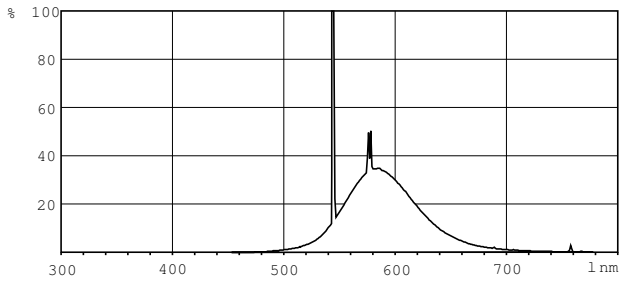

LDPB\_TL-DCOL\_160-Spectral power distribution B/W

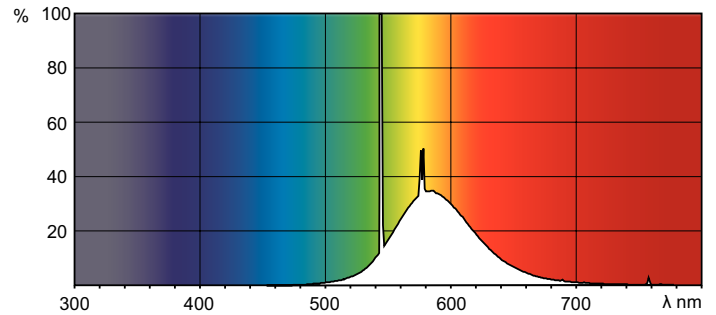

Lightcolour TL-D /160

