



Coreline Slim Batten

BN126C LED41S/840 PSU L1200

Polycarbonate diffuser

The new Coreline Slim Batten is slim design and comes in three sizes with two CCT choices based on specific customer needs.

Product data

General Information	
Lamp colour code	840 neutral white
Optical cover/lens type	Polycarbonate diffuser
Control interface	-
Protection class IEC	Safety class I (I)
CE mark	CE mark
Number of products on MCB (16 A type B)	45
LED engine type	LED
Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.9
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Steel
Optical cover/lens material	Polycarbonate
Optical cover/lens finish	Opal
Overall length	65 mm

Overall width	65 mm
Overall height	1135 mm
Colour	White RAL 9003

Approval and Application

Ingress protection code	IP20 (front IP40)
Mech. impact protection code	IK04 [0.5 J standard plus]

Initial Performance (IEC Compliant)

Initial luminous flux	4100 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	107 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial input power	38 W
Power consumption tolerance	+/-10%

Application Conditions

Ambient temperature range	-20 to +40 °C
---------------------------	---------------

Product Data

Full product code	692382863853599
-------------------	-----------------


Coreline Slim Batten

Order product name	BN126C LED41S/840 PSU L1200
EAN/UPC – product	6923828638535
Order code	911401898980
Numerator – quantity per pack	1
SAP numerator – packs per outer box	8

Material no. (12 NC)	911401898980
SAP net weight (piece)	1.510 kg



Dimensional drawing

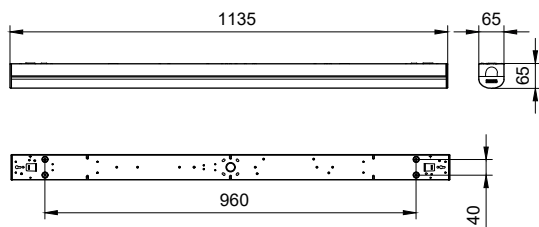

BN126C

