



GreenPerform Panel

RC160V LED40S 840 W60L60 PSU OC CAU

Wide beam - Polystyrene bowl/cover prismatic - 90° -

GreenPerform Panel is the slimmest Panel with highest efficacy in the market. It offers two lumen options with four dimension types, 200X1200, 300X1200, 600x600,600x1200, and three mounting options, recessed, suspended and plaster ceiling.

Product data

General Information		Number of products on MCB (16 A type B)	
Beam angle of light source	- °		30
Lamp colour code	840 neutral white	EU RoHS compliant	Yes
Light source replaceable	No	Light source engine type	LED
Number of gear units	1 unit	Operating and Electrical	
Driver/power unit/transformer	No [-]	Input Voltage	220 to 240 V
Driver included	Yes	Input frequency	50 to 60 Hz
Optic type	WB [Wide beam]	Initial CLO power consumption	NA W
Optical cover/lens type	Polystyrene bowl/cover prismatic	Average CLO power consumption	NA W
Luminaire light beam spread	90°	Inrush current	15.8 A
Control interface	-	Inrush time	181 ms
Connection	CI [Internal connector]	Power factor (min.)	0.9
Cable	-	Controls and Dimming	
Protection class IEC	Safety class II (II)	Dimmable	No
Glow-wire test	650/30 [Temperature 650 °C, duration 30 s]	Mechanical and Housing	
Flammability mark	NO [-]	Housing material	Aluminium
CE mark	CE mark	Reflector material	-
ENEC mark	-	Optic material	Polystyrene
Warranty period	3 years		
Constant light output	No		

GreenPerform Panel

Optical cover/lens material	Polystyrene
Fixation material	Steel
Optical cover/lens finish	Mask (anti-glare)
Overall length	595 mm
Overall width	595 mm
Overall height	9.3 mm
Colour	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	4000 lm
Luminous flux tolerance	+/-5%
Initial LED luminaire efficacy	110 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM<4
Initial input power	36 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L80B50	50000 h
---------------------------	---------

Application Conditions



Ambient temperature range	-20 to +45 °C
Maximum dimming level	Not applicable

Product Data

Full product code	911401719602
Order product name	RC160V LED40S 840 W60L60 PSU OC CAU
Order code	911401719602
Local order code	RC160V40S46060P
SAP numerator – quantity per pack	1
Numerator – packs per outer box	2
SAP material	911401719602
SAP net weight (piece)	0.974 kg



Dimensional drawing

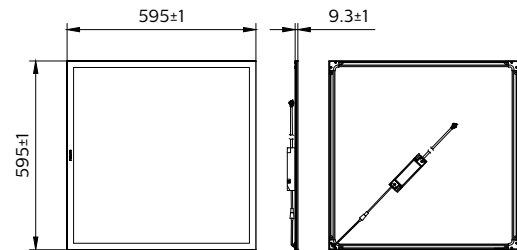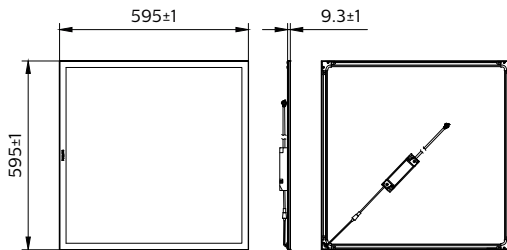

RC160V LED40S 840 W60L60 PSU OC CAU

RC160V LED40S 840 W60L60 PSU OC CAU

