



# MASTER TL5 High Output



## MASTER TL5 HO 39W/840 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	G5 [ G5]
Life to 50% failures preheat (nom.)	30000 h
Features	na [ Not Applicable]
System description	High Output (HO)
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	99 %
LSF preheat 6,000 hours rated	99 %
LSF preheat 8,000 hours rated	99 %
LSF preheat 16,000 hours rated	97 %
LSF preheat 20,000 hours rated	84 %
	Sphere
Light Technical	
Colour Code	840 [ CCT of 4,000 K]
Lamp Luminous Flux 25°C EL (Nom)	3100 lm
Lamp Luminous Flux (Nom)	3100 lm
Colour Designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	92 lm/W

Chromaticity coordinate X (nom.)	0.38
Chromaticity coordinate Y (nom.)	0.38
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	82 lm/W
Colour Rendering Index,horiz (Max)	85
Colour Rendering Index,horiz (Min)	80
Colour Rendering Index,horiz (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	38.0 W
Lamp current (nom.)	0.325 A

# MASTER TL5 High Output

## Temperature

Design temperature (nom.)	35 °C
---------------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Cap-base information	Green Plate
Bulb shape	T5 [ 16 mm (T5)]

## Approval and Application


Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	38 kWh

423559

## Product Data

Full product code	871150063964655
Order product name	MASTER TL5 HO 39W/840 SLV/40
EAN/UPC – product	8711500639646
Order code	927928584055
Local order code	TL539W840HO
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	927928584055
SAP net weight (piece)	79.200 g
ILCOS code	FDH-39/40/1B-L/P-G5-16/850



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 39W/840 SLV/40	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm

TL5 HO 39W/840

## Photometric data

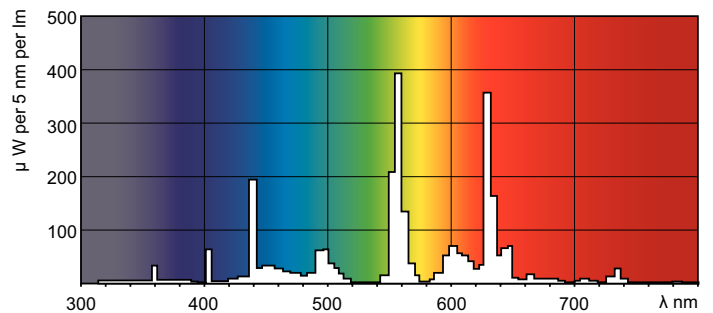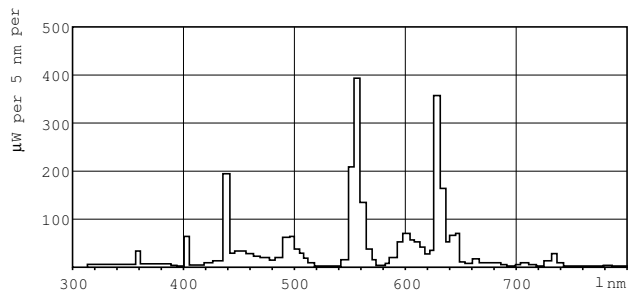


Lightcolour /840

Lightcolour /840

# MASTER TL5 High Output

## Lifetime



LDLE\_TL5-HO8\_0001-Life expectancy diagram

LDLE\_TL5-HO8\_0002-Life expectancy diagram



LDLM\_TL5-HO8\_0001-Lumen maintenance diagram

