



# MASTER SDW-TG Mini

## MASTER SDW-TG Mini 100W/825 GX12-1 1CT/12

Range of high-efficiency, discharge lamps with warm colour to be used in small, open luminaires designed around MASTERColour CDM-T lamps

### Warnings and Safety

- Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	GX12-1 [ GX12-1]
Burning Position	UNIVERSAL [ Any/Universal]
Life to 5% failures (nom.)	5000 h
Life to 20% failures (nom.)	8000 h
Life to 50% failures (nom.)	10000 h
ANSI code HID	S167
System description	na [ -]

Light Technical	
Colour Code	825 [ CCT of 2,500 K]
Lamp Luminous Flux (Min)	4400 lm
Lamp Luminous Flux (Nom)	5300 lm
Colour Designation	Golden White
Lumen maintenance 10,000 hours (min.)	65 %
Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (min.)	85 %

Lumen maintenance 2,000 hours (nom.)	95 %
Lumen maintenance 5,000 hours (min.)	75 %
Lumen maintenance 5,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	469
Chromaticity coordinate Y (nom.)	406
Colour Temperature, horizontal (Nom)	2500 K
Lamp Luminous Efficacy EM (Nom)	52 lm/W
Colour Rendering Index,horiz (Min)	80
Colour Rendering Index,horiz (Nom)	82

Operating and Electrical	
Power (Rated) (Nom)	102.0 W
Lamp current run-up (max.)	2.4 A
Ignition peak voltage (max.)	4000 V
Ignition supply voltage (min.)	205 V
Re-ignition time (min.) (max.)	1.5 min
Ignition time (max.)	60 s

# MASTER SDW-TG Mini

Voltage (Max)	98 V
Voltage (Min)	84 V
Voltage (Nom)	91 V

## Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	2 min

## Mechanical and Housing

Lamp Finish	Clear
Bulb material	-

## Approval and Application

Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	15.2 mg
Energy consumption kWh/1,000 hours	109 kWh

## Luminaire Design Requirements

Bulb temperature (max.)	650 °C
Cap-base temperature (max.)	280 °C

Pinch temperature (max.)	350 °C
--------------------------	--------


## Initial Performance (IEC Compliant)

Colour Rendering Index	82
------------------------	----

## Product Data

Full product code	871150020233815
Order product name	MASTER SDW-TG Mini 100W/825 GX12-1 1CT/12
EAN/UPC – product	8711500202338
Order code	928158905131
Local code	SDWTG100W
Numerator – quantity per pack	1
SAP numerator – packs per outer box	12
Material no. (12 NC)	928158905131
Net Weight (Piece)	0.030 kg
ILCOS code	STH-100/25/1B-GX12-1


## Dimensional drawing



SDW-TG 100W/825 GX12-1

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTER SDW-TG Mini 100W/825 GX12-1 1CT/12	20 mm	0.75 in	18 mm	54.5 mm	57.5 mm	56 mm	110 mm

## Photometric data


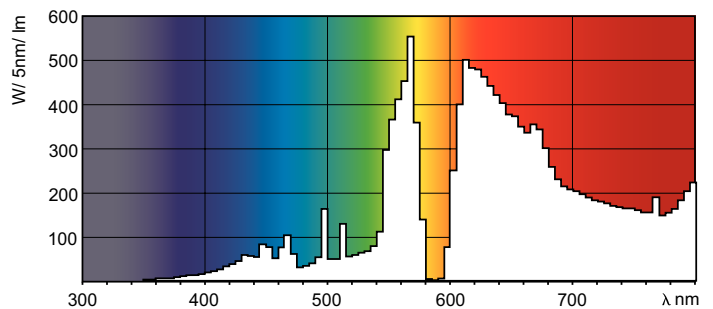


LDPO\_SDW-TG-Spectral power distribution Colour

MASTER SDW-TG

# MASTER SDW-TG Mini

## Lifetime

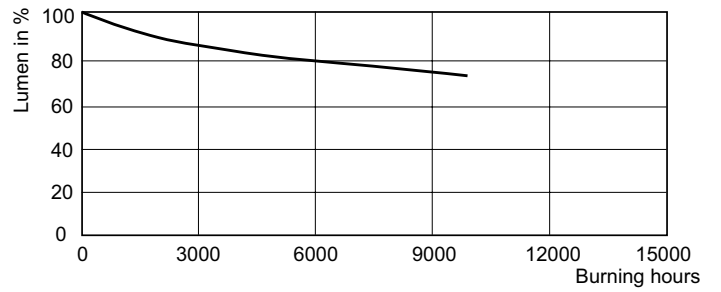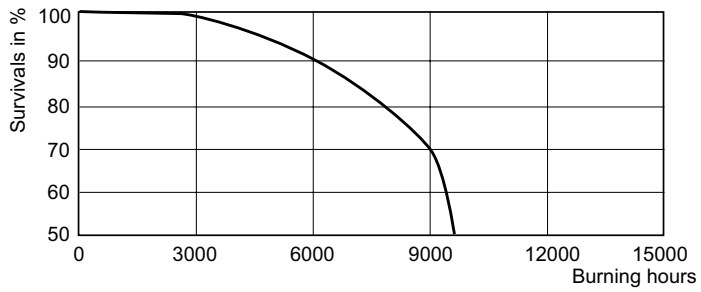

LDLM\_SDW-TG\_100W\_825-Lumen maintenance diagram

